

Surface Fixed Petal Drum Page 1 of 3



Instrument Components:



M6x20 Security Screw



M6 Saddle Strap

Metric Conversion: 1080mm/42.5" 1.5m/59"



Installation Instructions









Weight of heaviest part 7.5kg


- 1. Instrument will arrive on site fully assembled. (1.1) (See Assembly Guide)
- 2. Attach Surface Fixing posts to legs (1.2) (See Surface Fix Post Installation Sheet)





- 5. Make sure all fixings are covered and secure using cover caps provided
- **6**. Attach the 1 of the beaters to each of the saddle strap on the hex frame. (1.3)



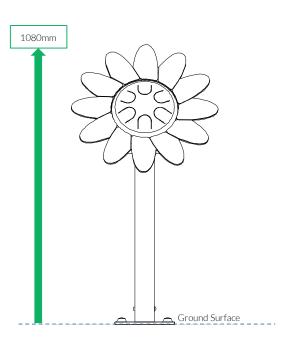











Surface Fixed Petal Drum Page 2 of 3



Instrument Components:


M6x20 Security Screw

M6 Saddle Strap

Thread Lock Solution Required (Not Supplied)



Assembly Guide PPPETA

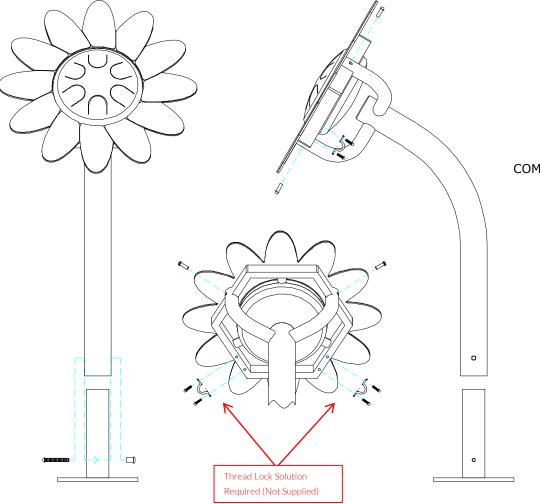



COMPONENTS LIST:

2 Part Cover Cap X8

M8X25 Pin trox X3

Saddle Strap X2

M6x20 Pin torx X4

M10x70 Pin torx X1

M10 Barrel Nut Pin torx X1



Surface Fix Components:







Surface Fixed Petal Drum Page 3 of 3



Components:




x1


M10x70 Security Screw

Thread Lock Solution
Required (Not Supplied)


Surface Fix Post Installation

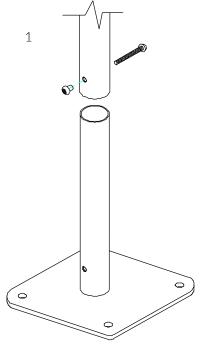

Locate the Surface fix Plate into the leg of the instrument.



Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use **thread locking solution** to prevent fixings working loose.

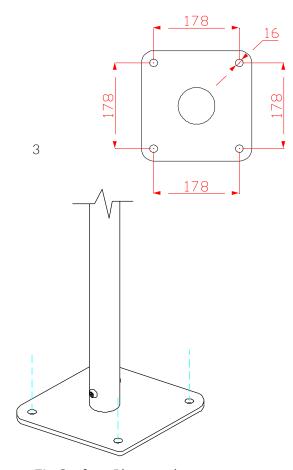

Fix Surface Plate to the ground surface **Ground Anchors Not provided**cover fixings with caps provided

